



figure 1

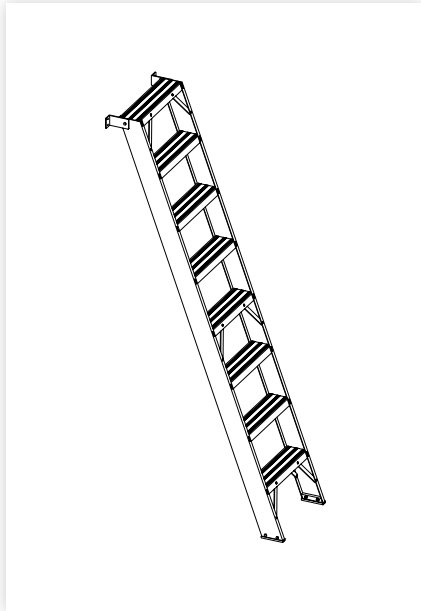


figure 2

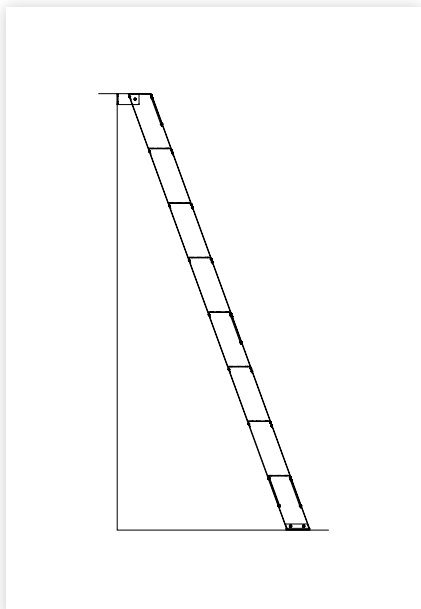


figure 3

## Fixed Ladder

### Installation Instructions

#### Important

These instructions are not intended to be a complete lesson in the installing of fixed ladders but a procedural guide to competent tradespeople or DIYers.

#### Tools Required

The screws supplied with this ladder require a 5/16" nut setter for easy installation. This can be used with a 18v battery drill or a standard power drill. Apart from this, only standard carpentry tools are required.

#### Installing The Ladder

Note: Sellwood fixed ladders are custom-built to a predefined vertical height upon order confirmation, requiring no further adjustment.

1. Position the fixed ladder in the desired location, ensuring that the ladder feet are flush on the ground.
2. Secure the ladder in place by screwing through the fixing brackets using the fixings provided. Ensure that the screws penetrate solid timber or support material.
3. Sellwood fixed ladders are set at a 70-degree angle. Double-check that the ladder feet and treads are level with the ground.