

figure 1

Hook Ladder

Installation Instructions

Important

These instructions are not intended to be a complete lesson in the installing of hook ladders but a procedural guide to competent tradespeople or DIYers.

Tools Required

The screws supplied with this ladder require a 5/16" nut setter for easy installation. This can be used with a 18v battery drill or a standard power drill. Apart from this, only standard carpentry tools are required.

Installing The Ladder

Note: Sellwood hook ladders are custom-built to a predefined vertical height upon order confirmation, requiring no further adjustment.

1. Position the hook ladder in the desired location, ensuring that the ladder feet are flush on the ground.
2. Insert the bar under the hooks. Adjust the height so that the hooks are securely hooked over the bar and the feet are flush on the floor.
3. Secure the bar in place by screwing through the fixing brackets using the fixings provided. Ensure that the screws penetrate solid timber or support material.
4. Sellwood hook ladders are set at a 70-degree angle. Double-check that the ladder feet and treads are level with the ground.

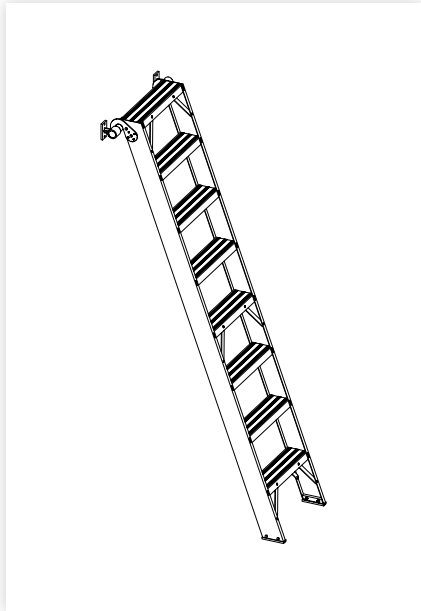


figure 2

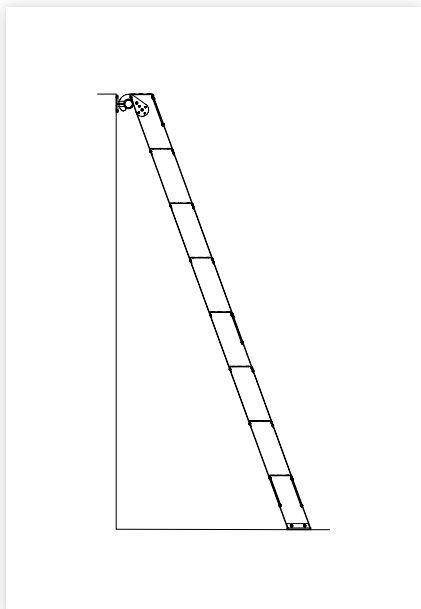


figure 3